


INSTALLATION DETAIL

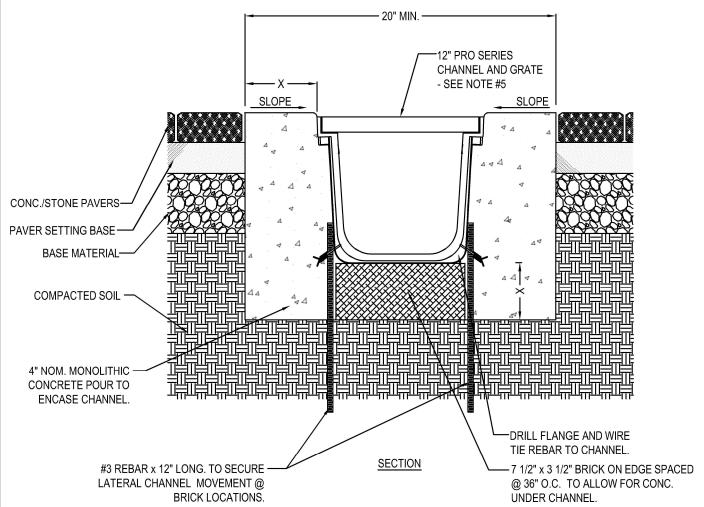

LOAD CLASS		
CLASS A PEDESTRIAN 15 kN/3375 LBS	CLASS B LIGHT DUTY 125 kN/28,000 LBS	CLASS C MEDIUM DUTY 250 kN/56,000 LBS
X = 4"	X = 4"	X = 6"

NOTES:

- INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
 EXPANSION AND CONTRACTION CONTROL JOINTS ARE RECOMMENDED TO PROTECT THE CHANNEL AND SURROUNDING CONCRETE. CONSULT WITH AN ENGINEER NECESSARY.
- MINIMUM CONCRETE COMPRESSIVE STRENGTH OF 4000 PSI AND VIBRATION TO ELIMINATE AIR POCKETS IS RECOMMENDED.
- THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS AND CONTRACTORS FOR PLANNING PURPOSES.
- RECESS CHANNEL AND GRATE 1/8" FOR PEDESTRIAN TRAFFIC,1/4" FOR VEHICULAR TRAFFIC.
- DRAWING IS NOT TO SCALE.



12" PRO SERIES INSTALLATION

REBAR SUSPENSION W/ PAVERS

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com, DESIGN ASSISTANCE- designworx@ndspro.com 851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994

SAVE DATE: 5/21/2021 6:24 AM