





NDS, INC.  
 851 NORTH HARVARD AVE.  
 LINDSAY, CA 93247  
 TOLL FREE: 1-800-726-1994  
 PHONE: (559) 562-9888  
 FAX: (559) 562-4488  
 www.ndspro.com

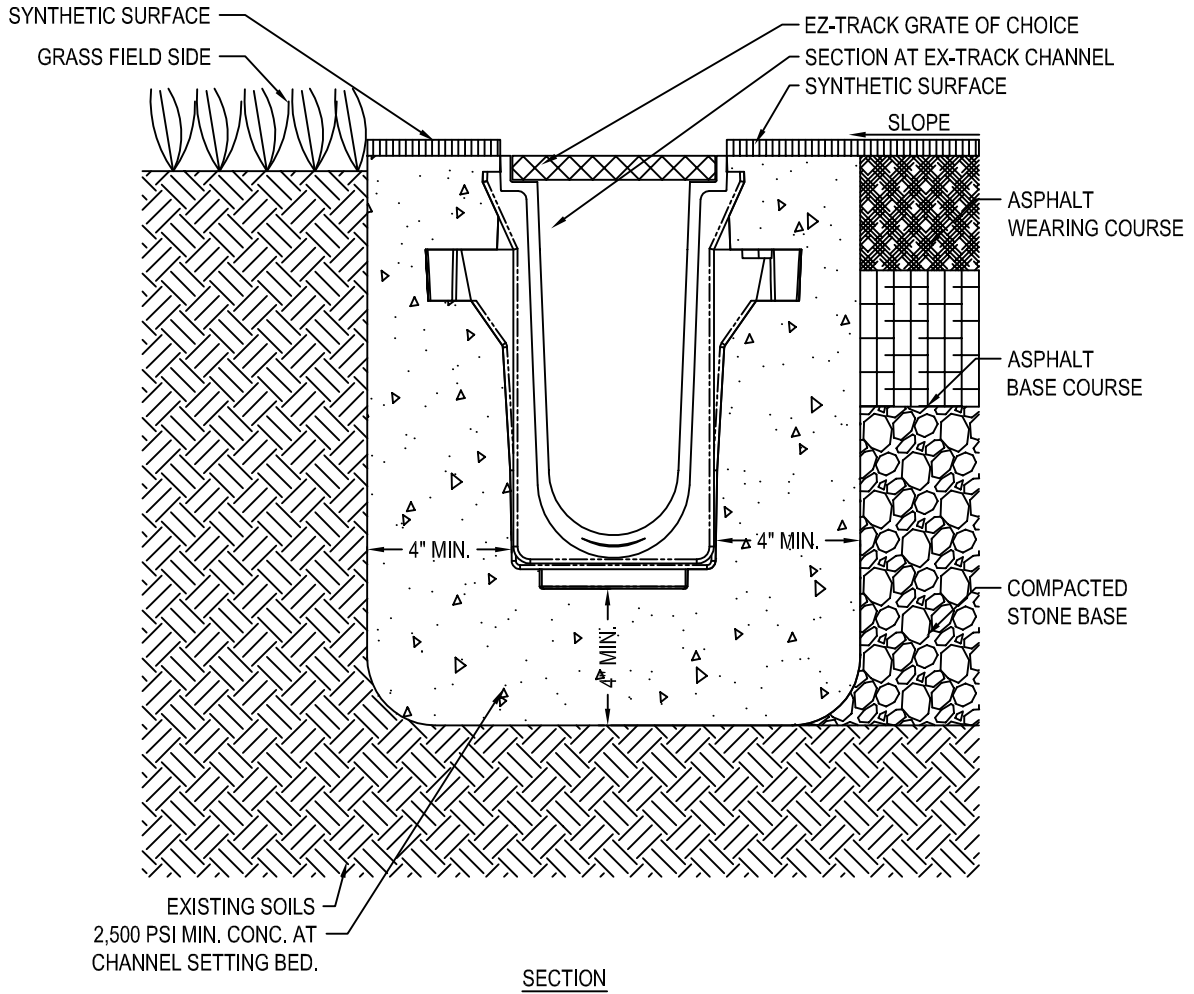

**NOTES:**

1. SET TRENCH DRAIN IN CHANNEL SURROUNDED BY 4" OF CONCRETE WITH A MINIMUM OF 2,500 PSI. SLOPE CONCRETE OFF THE TOP OF AND AWAY FROM THE DRAIN.
2. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
3. DO NOT SCALE DRAWING.
4. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY.
5. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



**EZ TRACK TRENCH DRAIN SYSTEM**

EZ TRACK TRENCH DRAIN - FULL CONCRETE ENCASUREMENT - FLUSH CONCRETE GRASS INFIELD SIDE