





NDS, INC.
 851 NORTH HARVARD AVE.
 LINDSAY, CA 93247
 TOLL FREE: 1-800-726-1994
 PHONE: (559) 562-9888
 FAX: (559) 562-4488
 www.ndspro.com

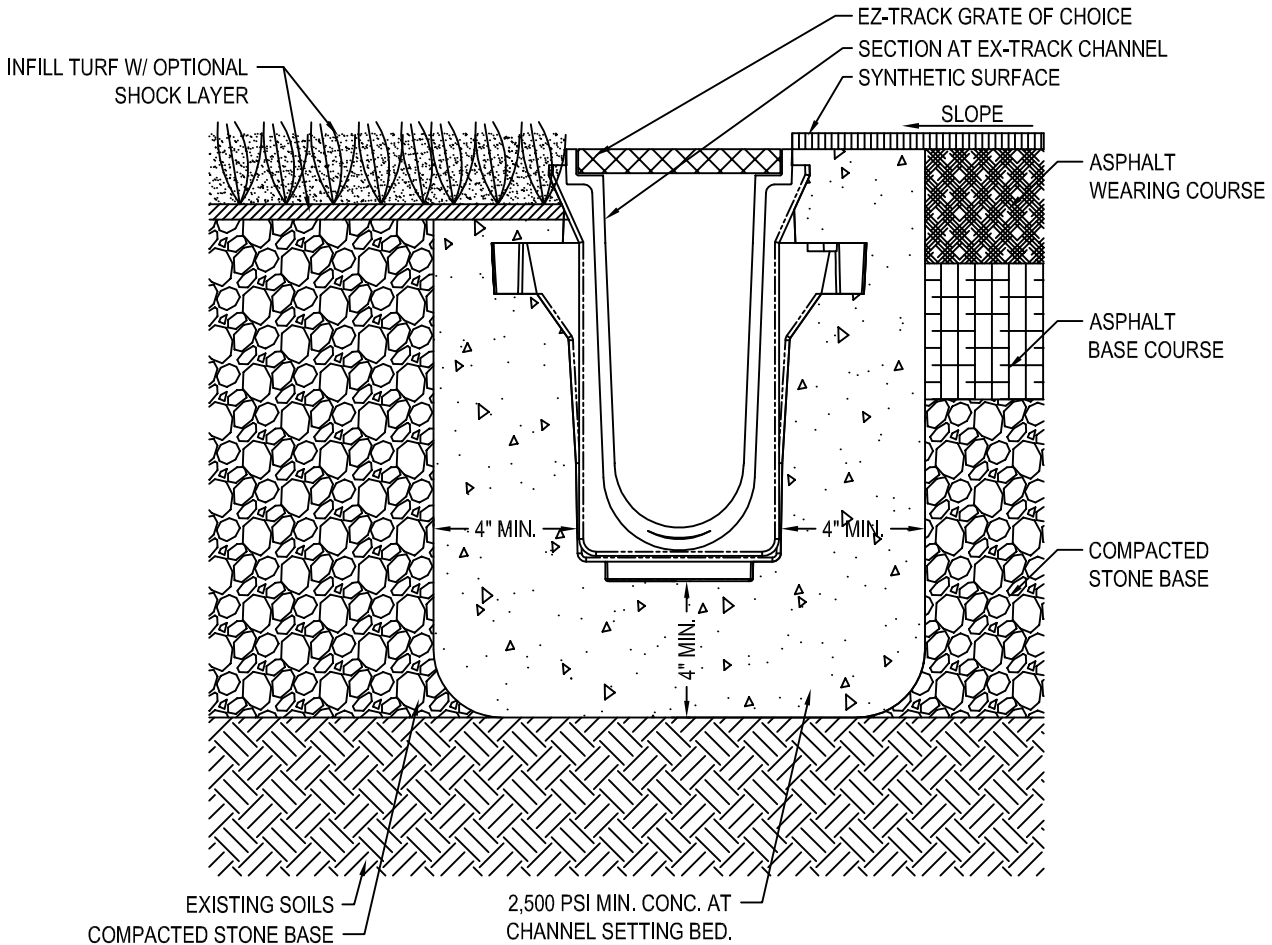

SECTION

NOTES:

1. SET TRENCH DRAIN IN CHANNEL SURROUNDED BY 4" OF CONCRETE WITH A MINIMUM OF 2,500 PSI. SLOPE CONCRETE OFF THE TOP OF AND AWAY FROM THE DRAIN.
2. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
3. DO NOT SCALE DRAWING.
4. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
5. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



EZ TRACK TRENCH DRAIN SYSTEM

EZ TRACK TRENCH DRAIN - FULL CONCRETE ENCASEMENT
 - FLUSH SYNTHETIC TURF FLUSH INFIELD SIDE