




## TECHNICAL SPECIFICATION

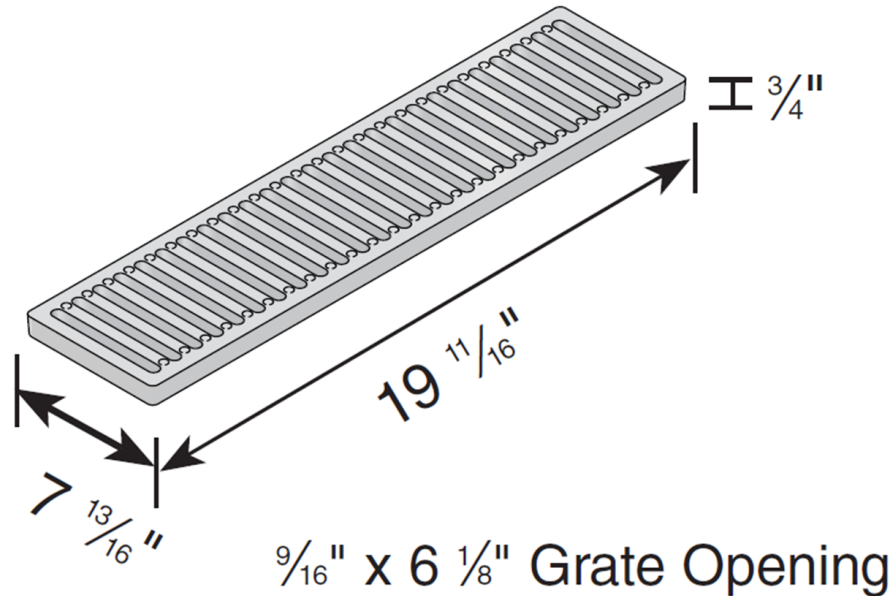

PART NUMBER	SIZE	SLOT WIDTH	LOAD CLASS	OPEN AREA FLOW RATE W/ 1/2" HEAD	WEIGHT	ADA	HEEL PROOF
888	7-13/16" X 19-11/16" X 3/4"	9/16" X 6-1/8"	C	23.3IN <sup>2</sup> / LINEAR FOOT 71.28 GPM / LF	18.20 LBS	NO	NO


### SPECIFICATION:

MATERIAL: DUCTILE IRON

LOAD CLASS C— LOADS BETWEEN 176-325PSI, RECOMMENDED FOR HEAVY DUTY PNEUMATIC TIRE FORKLIFTS AND TRACTOR-TRAILERS AT SPEEDS LESS THAN 20 MPH. H-20 RATED.

REQUIRES #829 STAINLESS STEEL SCREWS (4 PER GRATE)

FITS 8" PRO SERIES CHANNEL



### 8" PRO SERIES GRATE

DUCTILE IRON - "SLOTTED", LOAD CLASS C

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT [techservice@ndspro.com](mailto:techservice@ndspro.com)  
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994