

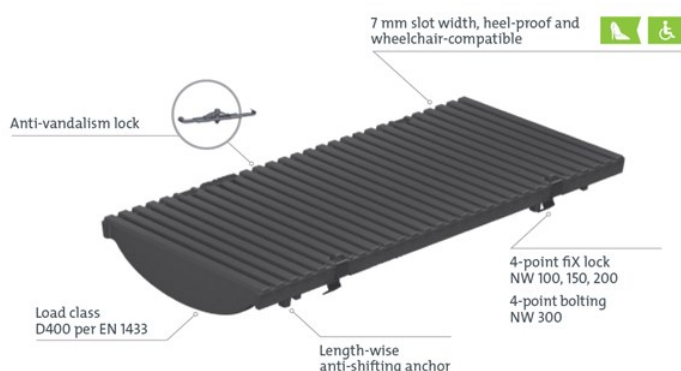


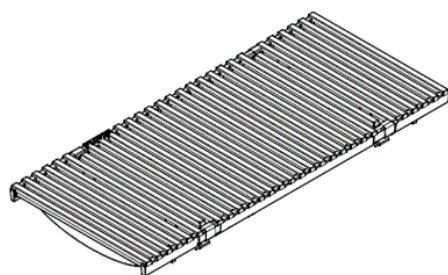

TECHNICAL SPECIFICATION

NDS-FILCOTEN 8 INCH "KIARO" DUCTILE IRON GRATE

17020183

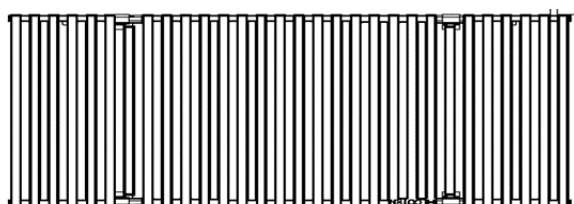

PART NUMBER	SIZE	SLOT WIDTH	LOAD CL DIN	INLET AREA / METER		WEIGHT	ADA	HEEL PROOF
				FLOW RATE W 1/2" HEAD				
17020183	8.7 x 19.7 inch (222 x 500 mm)	0.22 inch (5.7 mm)	D 400 kN	106 inch ² /m (684 cm ² /m)		20.72 lbs (9.4 Kg)	YES	YES
				324.7 gpm/m [0.72 cfs/m] (20.49 LPS/m)				


SPECIFICATION:

NDS-FILCOTEN NW200, EXTRA HEAVY DUTY, (LOAD CLASS D 400 kN), DUCTILE IRON REINFORCED GRATE IS 8.74" (222 mm) WIDE, 19.70" (500 mm) LONG, 0.78" (20 mm) HIGH. THE GRATE HAS 0.22" (5.7 mm) WIDE SLOTS, AND IS ADA AND HEELPROOF COMPLIANT.

DIN CLASS D 400 kN LOAD RATED – 89,920 LBS. FOR PNEUMATIC FORKLIFT TRAFFIC, ROADS AND HIGHWAYS. DUCTILE IRON MANUFACTURED AND TESTED IN ACCORDANCE TO EN1433

EACH HALF METER GRATE IS SECURED TO THE BODY WITH FOUR POINT SNAP-IN LOCKING SYSTEM. OPTIONAL ANTI-VANDAL CLIP MAY BE SPECIFIED TO PREVENT THEFT.

FILCOTEN[®]
a brand of BG



FILCOTEN NW200 "KIARO" GRATE

8 INCH /ADA/HEELPROOF/ DUCTILE IRON / DIN CLASS D 400 kN

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994, OPTION '3'