



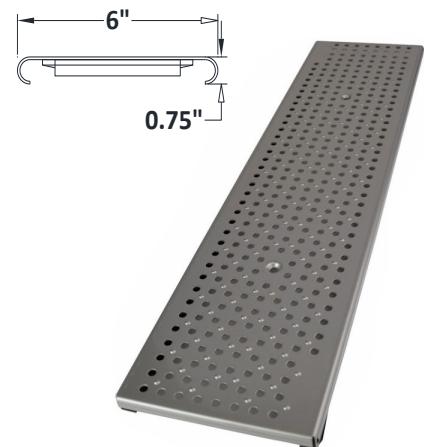

## TECHNICAL SPECIFICATION

### DURA SLOPE GALVANIZED / STAINLESS STEEL PERFORATED GRATE

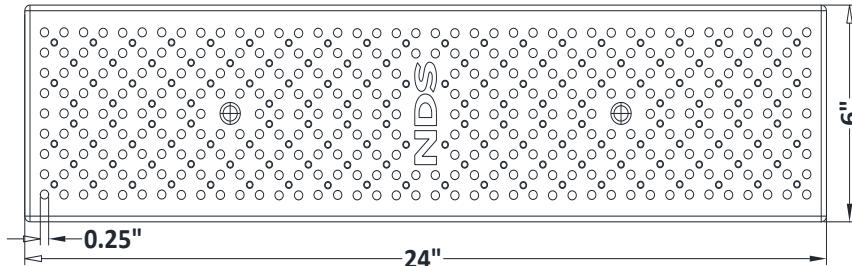

PART NUMBER	SIZE	SLOT WIDTH	LOAD CLASS	OPEN AREA FLOW RATE W/ 1/2" HEAD	WEIGHT	ADA	HEEL PROOF
DS-226 (STAINLESS STEEL)	6" x 24" x 0.75"	0.25" DIA HOLES	A	8.49 IN <sup>2</sup> / LINEAR FOOT 26 GPM / LF	3.16 LBS	YES	YES
DS-228 (GALVANIZED)	6" x 24" x 0.75"	0.25" DIA HOLES	A	8.49 IN <sup>2</sup> / LINEAR FOOT 26 GPM / LF	3.83 LBS	YES	YES

#### SPECIFICATION:

MATERIAL: DS-226 (STAINLESS STEEL) - 16 GA.— SS GRADE 304

DS-228 (GALVANIZED STEEL) - 14 GA

6" W x 24" L x 3/4" H


0.25" DIAMETER HOLES

LOAD CLASS A – LOADS OF 1-60 PSI, RECOMMENDED FOR PEDESTRIANS, BICYCLES, AND WHEEL CHAIR TRAFFIC.

REQUIRES (2) FH #1/4-20 X 1-1/2" SCREWS #629 (SUPPLIED WITH CHANNEL)

FITS ALL DURA SLOPE CHANNEL SECTIONS AND IN-LINE CATCH BASIN (DS-340)

—2 GRATES PER 4 FT CHANNEL



**DURA SLOPE GRATE**

GALVANIZED/STAINLESS STEEL PERFORATED

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT [techservice@ndsp.com](mailto:techservice@ndsp.com), DESIGN ASSISTANCE- [designworx@ndsp.com](mailto:designworx@ndsp.com)  
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994