



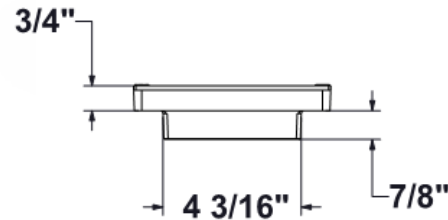

TECHNICAL SPECIFICATION

DURA SLOPE POLY PERFORATED GRATE

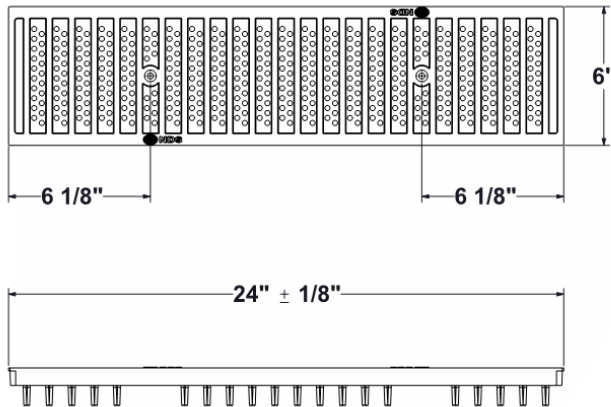

PART NUMBER	SIZE	SLOT WIDTH	LOAD CLASS	OPEN AREA FLOW RATE W/ 1/2" HEAD	WEIGHT (LBS)	ADA	HEEL PROOF
DS-670 (LT. GRAY)	6" x 24" x 3/4"	0.25"	B	8.75 IN ² / LINEAR FOOT 26.77 GPM / LF	2.81	YES	YES
DS-671 (WHITE)	6" x 24" x 3/4"	0.25"	B	8.75 IN ² / LINEAR FOOT 26.77 GPM / LF	2.81	YES	YES

SPECIFICATION:


MATERIAL: UV PROTECTED STRUCTURAL FOAM POLYOLEFIN 6" x 24" x 3/4"

LOAD CLASS B—LOADS OF 61-175 PSI. RECOMMENDED FOR MEDIUM DUTY PNEUMATIC TIRE TRAFFIC, AUTOS AND LIGHT TRUCKS AT SPEEDS LESS THAN 20 M.P.H.

REQUIRES (2) FH #1/4-20 X 1-1/2" SCREWS #629 (SUPPLIED WITH CHANNEL)

FITS ALL DURA SLOPE CHANNEL SECTIONS AND IN-LINE CATCH BASIN (DS-340)

—2 GRATES PER 4 FT CHANNEL



DURA SLOPE GRATE

POLY PERFORATED

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com, DESIGN ASSISTANCE- designworx@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994