


TECHNICAL SPECIFICATIONS

TS_Spee-D_GRATE_CI_Wave_ADA_HP_LOAD B-253CI

WAVE 24" SPEE-D CAST IRON DECORATIVE GRATE

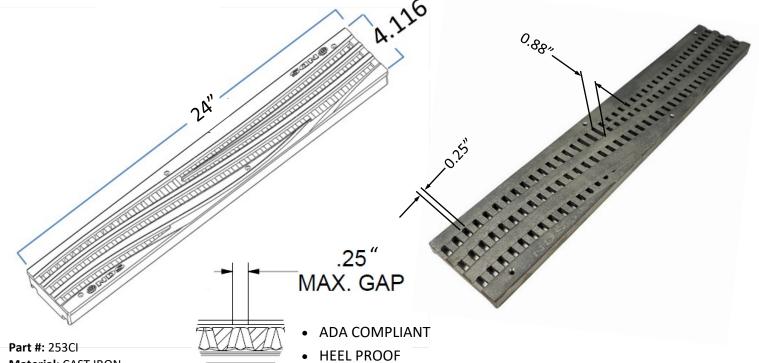

Material: CAST IRON

Color: Painted black for shipping and display only;

Grate will form iron-oxide patina

Weight: 7.5 lbs

Fits: Spee-D #400, #400-10

Dimension: 4.12 Inches WIDE x 24 Inches LONG x 0.75 inches HIGH

Grate Opening: 0.25 inches max. along length 0.88 inches max transverse

Open Surface Area: 7.41 in²/foot

Head Pressure (inches) - Flow Rate per foot:

0.5 inch - 23 GPM/foot 1 inch - 32 GPM/foot

NDS Screws #229 (#8 x 1")

Stainless steel screw Philips flat head

ADA Compliance

NDS provides a wide selection of grates that are compliant with the Americans with Disabilities Act. The ADA Accessibility Guidelines For Buildings and Facilities Section 4.5.4 specifies that ground and floor grates "shall have spaces no greater than 1/2 in (13 mm) wide in one direction."

We are pleased to provide grates that comply with these requirements, so that no individual need be limited from accessing the area safely and confidently.

To see if a grate is ADA compliant, please check the description of the product in our NDS Drainage Catalog: products that meet these requirements are marked "ADA compliant."

Like to find out more about ADA compliance and NDS? Send us your question and we'd be happy to help.



Recommended for medium-duty pneumatic tire traffic,

autos and light trucks at speeds less than 20 m.p.h.

Load Recommendation

Class B

Loads of 61-175 psi.

Rev 03/04/24

