


NDS, INC. 851 NORTH HARVARD AVE. LINDSAY, CA 93247 TOLL FREE: 1-800-726-1994 PHONE: (559) 562-9888 FAX: (559) 562-4488 www.ndspro.com

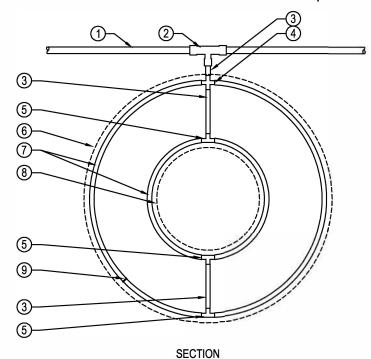

LEGEND:

- 1 PVC DRIP MANIFOLD PIPE
- PVC SCHEDULE 40 "T" OR "L"
- (3) 1/2" POLYETHYLENE TUBING, A600/BR BLANK TUBING
- 4 BARB CROSS INSERT FITTING, CR17
- 5 BARB TEE INSERT FITTING, T17
- 6 PROJECTED CANOPY LINE OF TREE
- $\overleftrightarrow{0}$ on surface drip line, dura FLO CV place as shown length as required
- 8 ROOTBALL
- 9 TIE DOWN STAKE, S8 (QUANTITY AS REQUIRED, SEE NOTES 2 & 3 BELOW)

NOTES:

- 1. DISTANCE BETWEEN LATERAL RINGS AND EMITTER SPACING TO BE BASED ON SOIL TYPE AND TREE CANOPY.
- 2. PLACE TIE-DOWN STAKES EVERY 3'-0" O.C. IN SAND 4'-0" O.C. IN LOAM AND 5'-0" O.C. IN CLAY SOILS.
- 3. AT FITTING WHERE THERE IS A CHANGE OF DIRECTION SUCH AS TEES OR ELBOWS, USE TIE-DOWN STAKES ON EACH LEG OF THE CHANGE OF DIRECTION.
- 4. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- 5. DO NOT SCALE DRAWING.
- 6. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY.
- 7. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.

NDS DURA FLO CV

DURA FLO CV - ON-SURFACE DRIPLINE AROUND TREE