




TECHNICAL SPECIFICATION

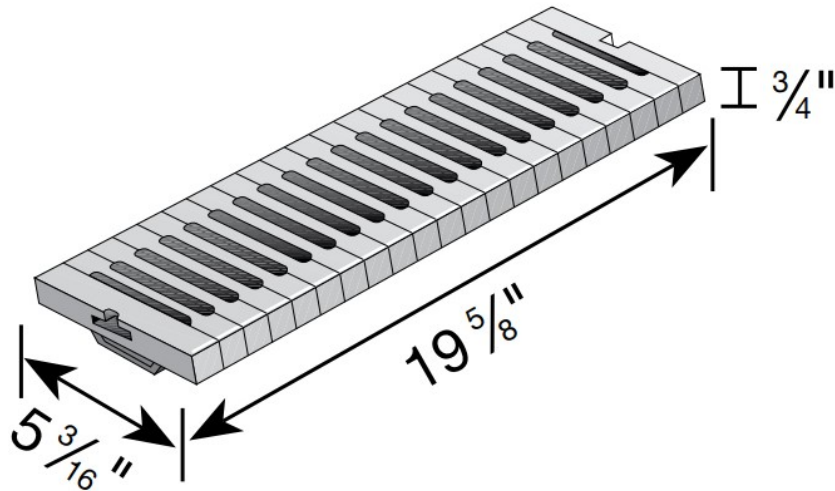

PART NUMBER	SIZE	SLOT WIDTH	LOAD CLASS	OPEN AREA FLOW RATE W/ 1/2" HEAD	WEIGHT	ADA	HEEL PROOF
828(LIGHT GRAY)	5-3/16" X 19-5/8" X 3/4"	3/8" X 1-1/4"	C	15.92 IN ² / LINEAR FOOT 48.7 GPM / LF	1.0LBS	YES	NO


SPECIFICATION:

MATERIAL: HIGH IMPACT GLASS-REINFORCED NYLON

LOAD CLASS C—RECOMMENDED FOR HEAVY-DUTY PNEUMATIC TIRE FORKLIFTS AND TRACTOR-TRAILERS AT SPEEDS LESS THAN 20 MPH. H-20 RATED

REQUIRES #829 STAINLESS STEEL SCREWS (4 PER GRATE)

FITS 5" PRO SERIES CHANNEL



5" PRO SERIES GRATE

FOR PRODUCT ASSISTANCE, CONTACT NDS TECHNICAL SERVICE AT techservice@ndspro.com, DESIGN ASSISTANCE- designworx@ndspro.com
851 N. HARVARD AVE. LINDSAY, CA 93247 WWW.NDSPRO.COM 1-800-726-1994